
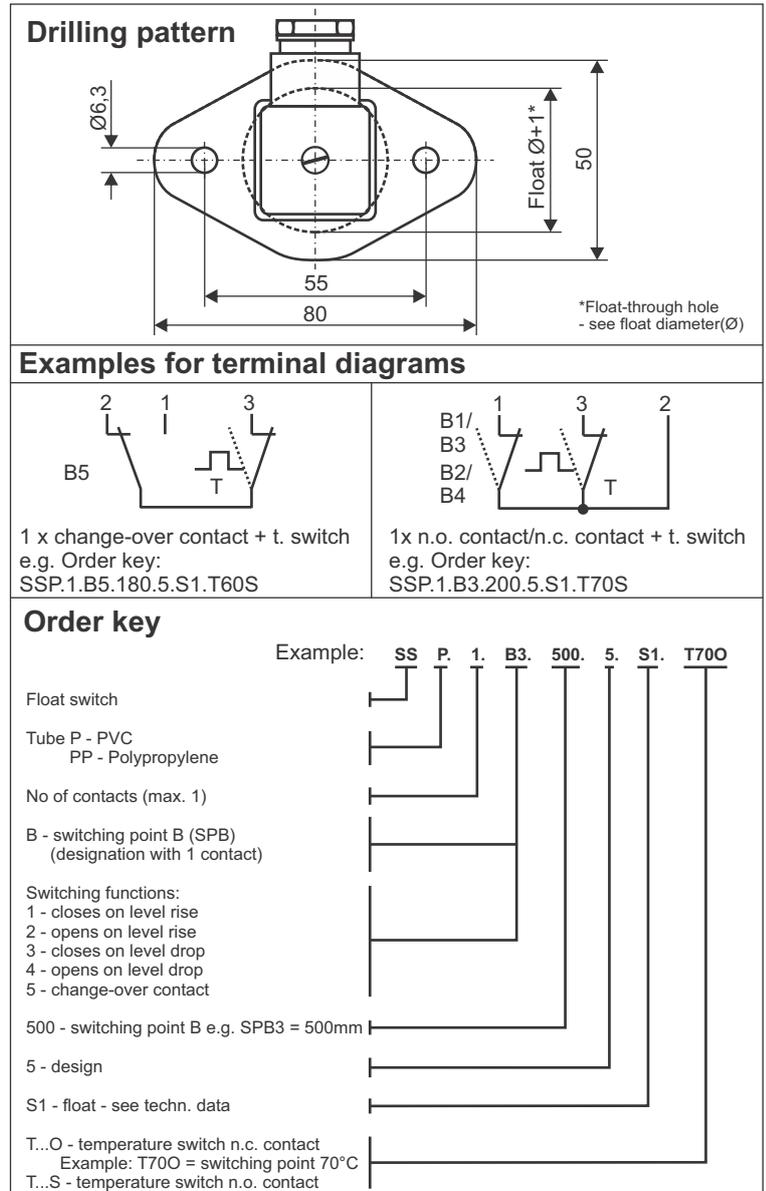


# Data sheet

## Float switch plastic design 5 in combination with temperature switch

### Type: SSP...5...T

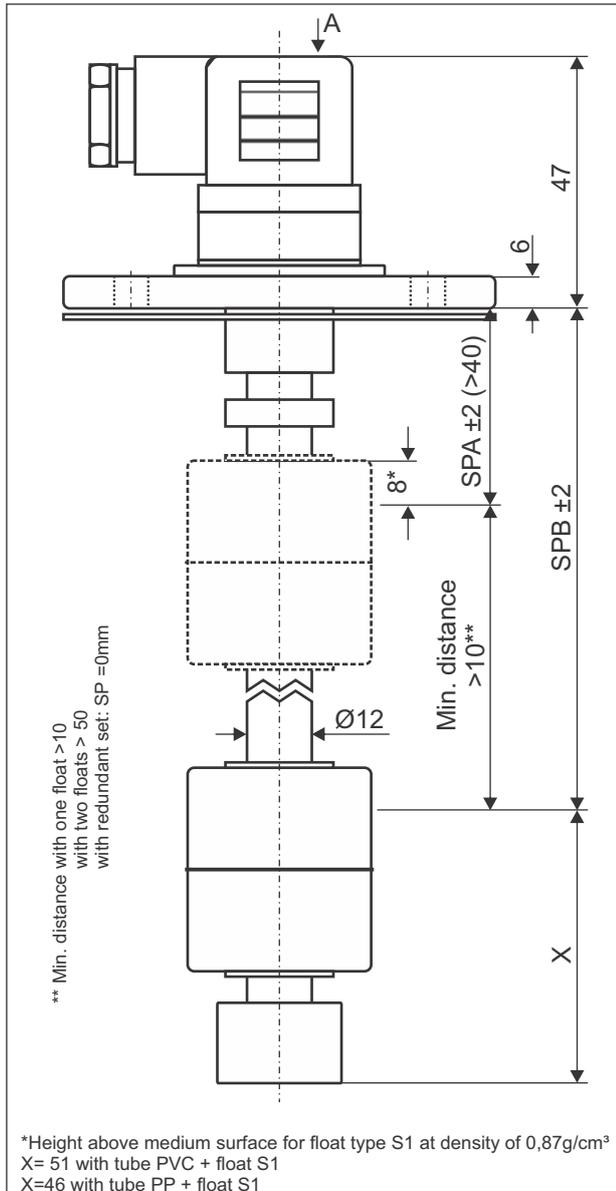

### Technical data

Connection:	plug-type connector 3-pole + PE, DIN EN 175301-803 (DIN 43650), material PA
Mounting:	oval-flange 80x50mm, material PA
Seal:	material NBR
Tube:	Ø12mm, material PVC or PP, length ±1mm acc. to customer specification
Float:	Ø35x40mm, material PP, type S1 Ø40x40mm, material PP, type S2 Ø40x27mm, material PP, type S3
Switching points:	reed contacts, max. 1x n.o. contact/n.c. contact or 1x change-over contact
Temperature switch:	bi-metal, switching function: n.o. contact/n.c. contact temperature range: 60°C to 80°C, further on request precision: ±5°C, smaller tolerances on request reset-temperature: temp.-switching point -30°C ±15°C
Switching voltage, current, capacity	230 VAC, 1A, 60VA
Pressure:	atmospheric
Operating temperature:	-10°C to 60°C in medium; -20°C to 70°C above mounting (with PVC) -10°C to 80°C in medium; -20°C to 70°C above mounting (with PP)
Protection rating:	IP 65

Subject to change  
Dimensions in mm