
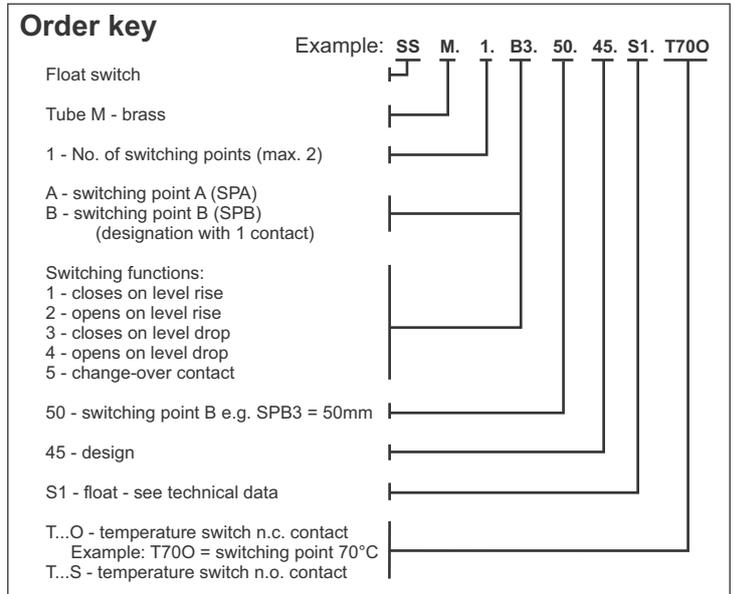
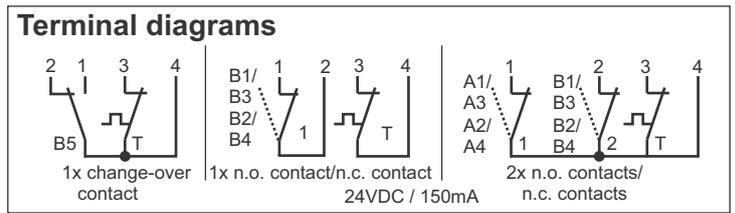
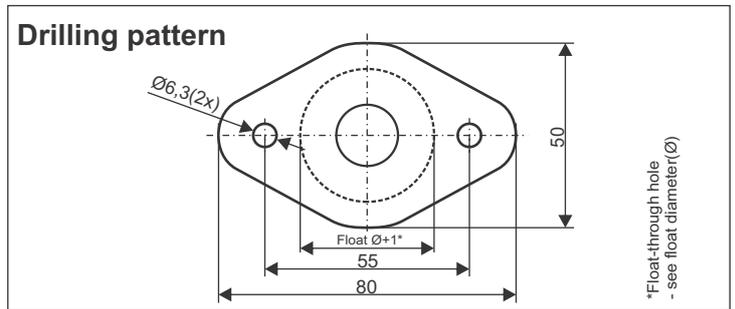


Data sheet

Float switch brass design 45 in combination with temperature switch

Type: SSM...45...T...

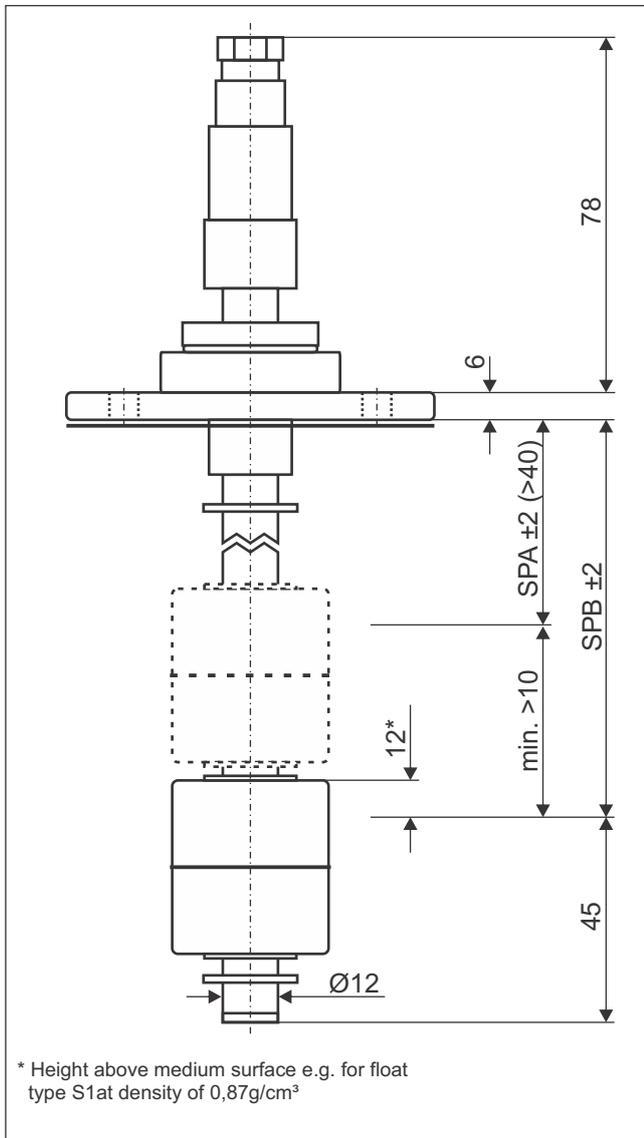

Technical data	
Connection:	plug-type connector M12x1 4-pole/5-pole depending on function with connector socket, material PA
Mounting:	oval-flange 80x50mm, material PA
Seal:	material NBR
Tube:	Ø12mm, material brass
Float:	Ø35x40mm, material PP, type S1 Ø40x40mm, material PP, type S2 Ø40x30mm, material PP, type S3 Ø45x52mm, material stainless steel 1.4571, type S4
Switching points:	reed contacts, max. 2x n.o. contacts/n.c. contacts or 1x change-over contact,
Temperature switch:	bi-metal, switching function: n.o. contact/n.c. contact temperature range: 60°C to 80°C; other TP on demand precision: ±5°C, smaller tolerances on request reset-temperature: temp.-switching point -30°C ± 15°C
Switching capacity:	24VDC / 150mA
Pressure:	atmospheric
Operating temperature:	-20°C to 80°C in medium, -20°C to 70°C above mounting
Protection rating:	IP 65