
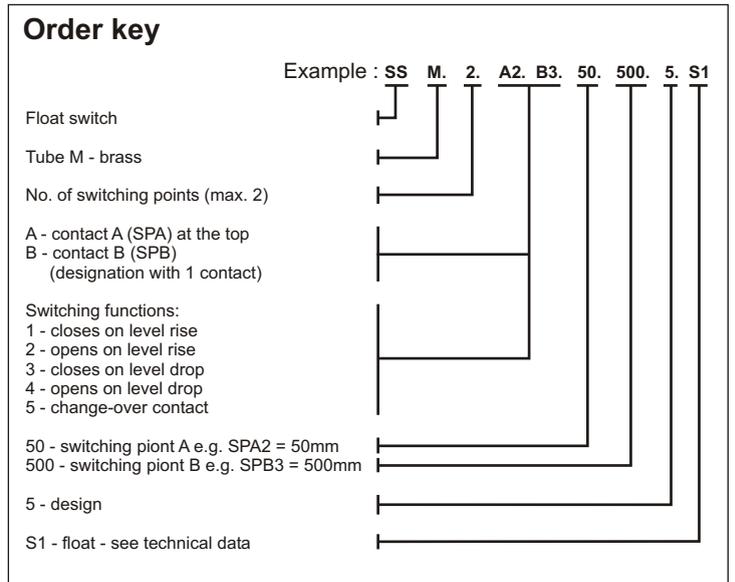
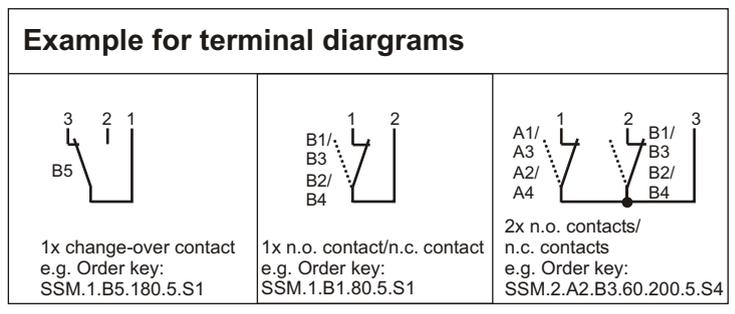
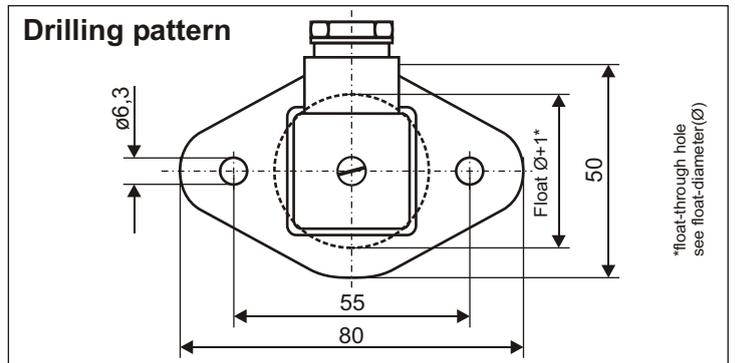


Data sheet

Float switch brass design 5

Type: SSM...5...

Device with temperature sensor or temperature switch combinable,
see also level / temperature measurement technology combined

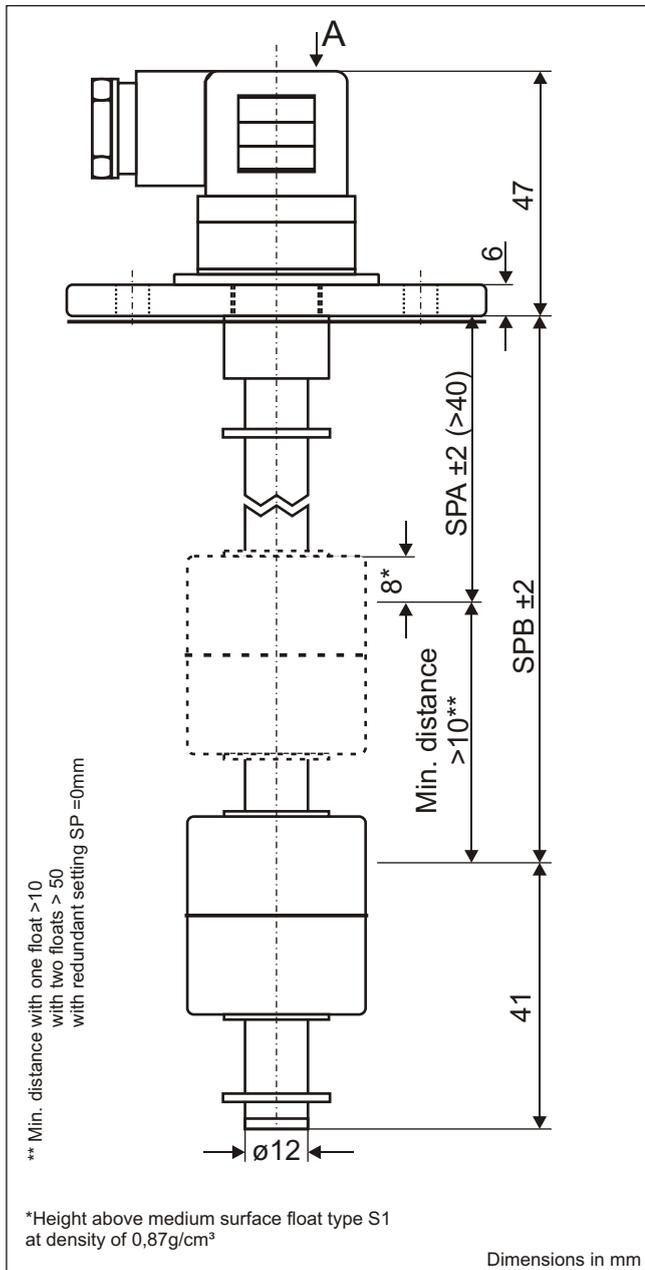

Technical data	
Connection:	plug-type connector 3 pole + PE, DIN EN 175301-803 (DIN 43650), material PA,
Mounting:	oval flange 80x50mm, material PA
Seal:	material NBR
Tube:	Ø12mm, material brass, length ±1mm acc. to customer specification
Float:	Ø35x40mm, material PP, type S1
Switching points:	reed contacts: max. 2x n.o. contacts / n.c. contacts or 1x change-over contact,
Switching voltage, current, output:	230 VAC, 1A, 60VA
Pressure:	atmospheric
Operating temperature:	-20°C to 80°C in medium; -20°C to 70°C above mounting
Protection rating:	IP 65